

# UNIC BERGERAC

SPECIALLY SUITABLE FOR VINEYARDS



#### TOP QUALITY

Teyme equipment offers the highest level of satisfaction thanks to our great level of self-demand.



#### R&D

Investing on research and development is the basis of our equipment's success.



#### RESPECTFUL


We care for the Earth, we care for the people.

SIMULTANEOUS APPLICATION ON 4 SIDES  
MEDIUM-FOCUSED TREATMENT  
SAVING IN TIME, PRODUCT AND LABOUR HAND  
HIGHEST EFFECTIVENESS, SAVING IN FUEL

# FEATURES


## GTU9 Ø915MM. AIR UNITS

- **LOW CONSUMPTION** propeller specially designed by TEYME.
- Air straightener deflector on suction.
- Distribution in jets: 16 on the air unit and 12 on aileirons.
- Inner deflectors, specially suitable for air conduction.
- **Bergerac deflector** with hydraulic aileirons, **specially suitable for vineyards.**
- Sturdy 2 speeds gear box + neutral point able to transfer up to 70hp in GTU9.
- Centrifugal 3-shoes ZAMAK clutch of smooth and progressive starting.
- Protection grids Suction/Impulsion complying with ISO rules.
- **Low noise level.**

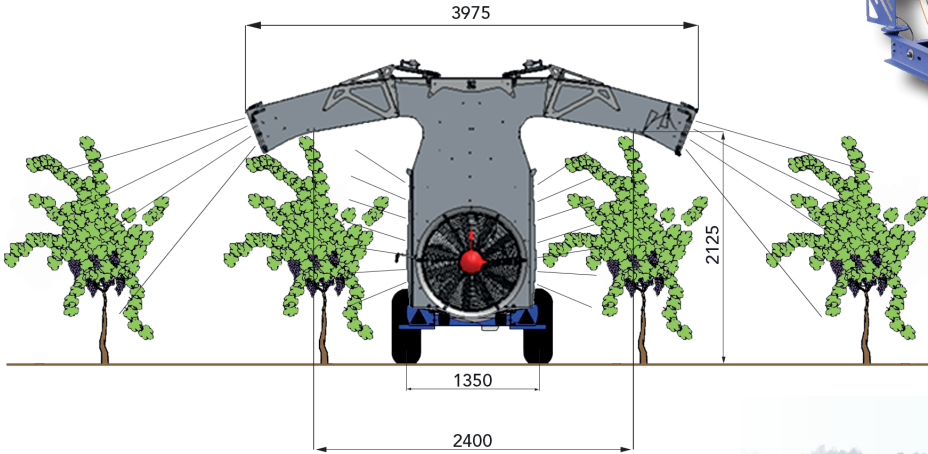

The flow and air pressure rates are balanced in the deflectors/low outlets to attain the same quality of treatment in both inner and external rows.

In the same way, the distribution of chemicals is equivalent in the 4 sides of treatment, with 4 double nozzle-holders in every single deflector and in the external outlets.

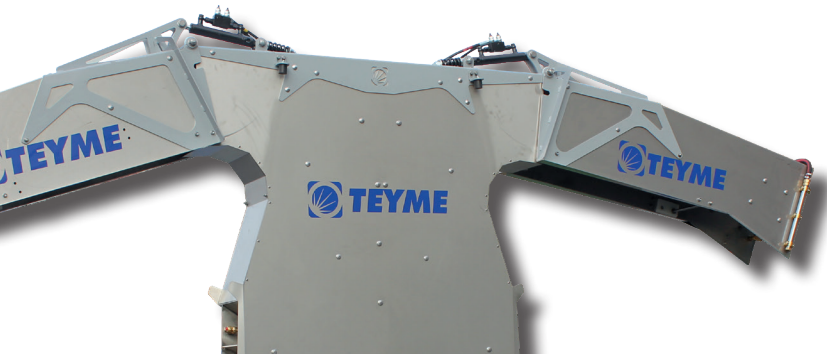

## PERFORMANCES BOARD

FAN POSITION		A 30°		B 35°		C 40°		D 45°	
GEAR BOX SPEED		I	II	I	II	I	II	I	II
RPM									
400	m³/h	23.300	27.500	30.800	36.200	36.100	42.500	42.400	50.000
	hp	5,4	9,3	8	14,7	11,3	20,1	16,6	28
480	m³/h	28.000	33.000	36.900	43.500	43.300	51.000	50.800	60.000
	hp	10	15,9	15,6	26,1	21,3	34,8	29,5	46,9
540	m³/h	31.500	37.000	41.500	48.900	48.700	57.400	57.200	67.400
	hp	14	21,9	22,7	36,4	30,5	48,4	41,3	64,1